


MODEL 340 WIRE TIE SYSTEM

- Highest knot strength in the industry.
- Assembled on easy mount frame for ease of application.
- Proximity switches for reduced parts wear and increased reliability.
- Track deflector/debris guard ensures trouble-free operation.
- Counterbalanced tilt back head for ease of field maintenance.
- Uses widest range of wire gauge (10-13ga.) of any tier on the market.
- 8 - sided wire cutter replaceable externally.
- Pinch wheels with triple grooves for extended wear life.
- Will run galvanized super Hi-Ten and galvanized premium wire.
- Track system is made of top quality heat-treated and nickel plated steel, which helps prevent rust and keep track clean.
- High efficiency 4 twist knot.
- Speeds - Typical cycle time up to 760 ties per hour. Actual tie time will vary based upon bale size and production capability of the total system.



MODEL 330 AND 340 WIRE TIE SYSTEMS

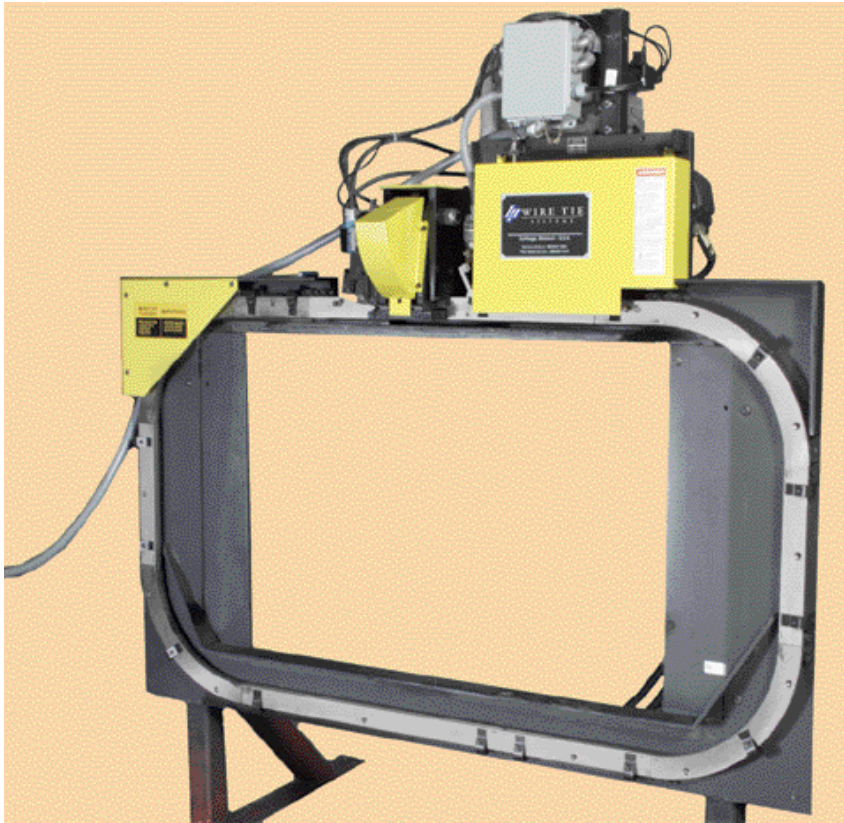

MODEL 330 WIRE TIE SYSTEM

- 100% adaptable to all 2-ram balers.
- Compatible with 11-12 ga. wire.
- Assembled on easy mount frame for ease of application.
- Track deflector/debris guard ensures trouble-free operation.
- Pinch rolls with two grooves for extended wear life.
- Left or right hand provides total layout flexibility.
- Track system is made of top-quality heat-treated and nickel plated steel, which helps prevent rust and keep track clean.
- Will run galvanized super Hi-Ten and galvanized premium wire.
- High efficiency 3-1/4 twist knot.
- Speeds - Typical cycle time up to 760 ties per hour. Actual tie time will vary based upon bale size and production capability of the total system.

Canadian Recycling Equipment and Systems Ltd
100 Frobisher Drive, Unit #2
Waterloo, Ontario. N2V 2A1
Tel (519) 746-0990 Fax (519) 746-8122